Cambridge Assessment International Education

DONE

Cambridge International AS & A Level

CANDIDATE NAME: Faizan Ahmed

CENTRE NUMBER:

CANDIDATE NUMBER:

CS BY AQIB KHAN

3141164855

COMPUTER SCIENCE **9618/23**

Paper 2 Fundamental Problem-solving and Programming Skills **May/June 2023**

2 hours

You must answer on the question paper.

You will need: Insert (enclosed)

INSTRUCTIONS

- Answer **all** questions.
- Use a black or dark blue pen.
- Write your name, centre number and candidate number in the boxes at the top of the page.
- Write your answer to each question in the space provided.
- Do **not** use an erasable pen or correction fluid.
- Do **not** write on any bar codes.
- You may use an HB pencil for any diagrams, graphs or rough working.
- Calculators must **not** be used in this paper.

INFORMATION

- The total mark for this paper is 75.
- The number of marks for each question or part question is shown in brackets [ ].
- No marks will be awarded for using brand names of software packages or hardware.
- The insert contains all the resources referred to in the questions.

THE AQIB KHAN
AN INSTITUTE OF O/A LEVEL

21 and 22

IT-W

This document has **20** pages. Any blank pages are indicated.

© UCLES 2023

TAK (The AQIB KHAN)- An institute of O/A level

Aki.Khan CS By AQIB Khan CS By AQIB KHAN TheAkikhan.com +92 3145030717

Refer to the **insert** for the list of pseudocode functions and operators.

1 The following pseudocode represents part of the algorithm for a program.

Line numbers are for reference only.

```
10   DECLARE Sheet4 : ARRAY[1:2, 1:50] OF INTEGER
...
100  FOR PCount ← 0 TO 49
101     Sheet4[1, PCount] ← 0
102     Sheet4[2, PCount] ← 47
103  NEXT PCount
```

(a) The pseudocode contains references to an array.

Complete the table by writing the answer for each row.

	Answer
The dimension of the array	2
The name of the variable used as an array index	Pcount
The number of elements in the array	100

[3]

(b) The pseudocode contains two errors. One error is that variable `PCount` has not been declared.

Identify the **other** error **and** state the line number where it occurs.

Error The second dimension index of Array is declared from 1 TO 50 but loop Runs 0 to 49

Line number 100, 101, 102

[2]

(c) The pseudocode does not include a declaration for `PCount`.

State the data type that should be used in the declaration.

Integer [1]

© UCLES 2023 9618/23/A/M/23
TAK (The AQIB KHAN) An institute of O/A level
Aki.Khan CS By AQIB Khan CS By AQIB KHAN TheAkikhan.com +92 3145030717
CS BY AQIB KHAN

(d) The pseudocode statements given in the following table are used in other parts of the algorithm.

Complete the table by placing **one or more** ticks (✓) in each row.

The first row has already been completed.

Pseudocode statement	Input	Process	Output
`INPUT MyChoice`	✓		
`OUTPUT FirstName & LastName`		✓	✓
`WRITEFILE YourFile, TextLine`			✓
`READFILE MyFile, TextLine`	✓		
`Result ← SQRT(NextNum)`		✓	

[4]

WRITE FILE → Output

Readfile → input

CS BY AQIB KHAN
THE AQIB KHAN
AN INSTITUTE OF O/A LEVEL

1 - SUN
2 - MON
3 - TUE
4 - WED
5 - Thur

2 A program stores a date of birth for a student using a variable, `MyDOB`, of type `DATE`.

(a) `MyDOB` has been assigned a valid value corresponding to Kevin's date of birth.

Complete the pseudocode statement to test whether Kevin was born on a Thursday.

`IF` Day Index (MyDOB) = 5 `THEN` [2]

(b) A function `CheckDate()` will take three integer parameters representing a day, month and year of a given date.

The function will validate the date of birth for a student that the parameters passed to it represent.
For a date to be valid, a student must be at least 18 in year 2020.

(i) Two of the parameter values can be checked without reference to the third parameter.

Describe these **two** checks.

Check 1 Value for month between 1 TO 12 (inclusive)

Range Check

Check 2 value of YEAR <= 2002

[2]

(ii) Several values of the parameter representing the day can only be checked completely by referring to the value of **one other** parameter.

Describe this check.

Day number matches with a relevant month day month
Eg 31/Jan/2024

[2]

CS BY AQIB KHAN
THE AQIB KHAN
© UCLES 2023
TAK (The AQIB KHAN) An institute of O/A level
Aki.Khan CS By AQIB Khan CS By AQIB KHAN TheAkikhan.com +92 3145030717

BLANK PAGE

CS BY AQIB KHAN

THE AQIB KHAN
AN INSTITUTE OF O/A LEVEL

STACT → LIFO

3 A program processes data using a stack. The data is copied to a text file before the program ends.

(a) The following diagram shows the current state of the stack.

The operation of this stack may be summarised as follows:

- The `TopOfStack` pointer points to the last item added to the stack.
- The `BottomOfStack` pointer points to the first item on the stack.
- The stack grows upwards when items are added.

POP = Remove
Push = Add

Stack		Pointer
Memory location	**Value**	
506		
505	WWW	← `TopOfStack`
504	YYY	
503	XXX	
502	ZZZ	
501	NNN	
500	PPP	← `BottomOfStack`

(i) An error will be generated if an attempt is made to POP a value when the stack is empty.

State the maximum number of consecutive POP operations that could be performed on the stack shown above **before** an error is generated.

6 ..... [1]

(ii) The following operations are performed:

1. POP and store value in variable `Data1`
2. POP and store value in variable `Data2`
3. PUSH value AAA
4. PUSH value BBB
5. POP and discard value
6. POP and store value in variable `Data2`

CS BY AQIB KHAN
THE AQIB KHAN AN INSTITUTE OF O/A LEVEL

Complete the diagram to show the state of the stack and the variables **after** the given operations have been performed.

Stack **Pointer**

Memory location	Value
506	
505	BBB
504	AAA
503	XXX ← Top of stack
502	ZZZ
501	NNN
500	PPP ← Bottom of stack

Variable	Value
Data1	WWW
Data2	AAA

[4]

(b) The data is copied to a text file before the program ends.

(i) State an advantage of writing the data from the stack to a text file before the program ends.

Data is permanetly saved

..... [1]

(ii) A module `SaveStack()` will write the data from the stack to a text file.

Express an algorithm for `SaveStack()` as five steps that could be used to produce pseudocode.

Write the **five** steps.

Step 1 Open the text file in write mode

Step 2 Check there is a value on the stack.

Step 3 Pop the value and store variable

Step 4 write the variable into textfile

Step 5 Repeat from step 2.

[5]

CS BY AQIB KHAN
THE AQIB KHAN AN INSTITUTE OF O/A LEVEL

TAK (The AQIB KHAN) An institute of O/A level
Aki.Khan CS By AQIB Khan CS By AQIB KHAN TheAkikhan.com +92 3145030717

COUNT → 3
ACHAR → Z

4 A function `MakeString()` will:

1. take two parameters:
   - a count as an integer → count
   - a character → ACHAR
2. generate a string of length equal to the count, made up of the character
3. return the string generated, or return `"ERROR"` if the count is less than 1.

ASTRING

For example, the function call:

`MakeString(3, 'Z')` will return the string `"ZZZ"`

Write pseudocode for function `MakeString()`.

```
FUNCTION MakeString (Count : Integer, Achar : Char)
                                    RETURNS STRING
    DECLARE AString : STRING
    DECLARE Index : INTEGER

    IF Count < 1 THEN
        AString ← "ERROR"
    ELSE
        AString ← "" // Blank String
        FOR Index ← 1 TO Count
            AString ← AString and AChar
    ENDIF
    NEXT Index
    RETURN AString
ENDFUNCTION
```

[6]

© UCLES 2023 9618/23/A/M/23
THE AQIB KHAN INSTITUTE OF O/A LEVEL
CS BY AQIB KHAN

chp 12

5 A program is designed, coded and compiled without errors. The compiled code is sent for testing.

(a) The program will be tested using the walkthrough method.

Additional information will be needed before this method can be used.

Identify this additional information **and** explain why it is needed.

Additional information ..... Input data / test data and expected output .....

Explanation ..... The structure / Algorithm of the program is known to test all path through the program can be tested. .....

[3]

(b) Testing is completed and the program is made available to users.

Some time later, changes are made to the program to improve the speed of response.

State the type of maintenance that has been applied to the program.

1 Perfective ..... [1]

CS BY AQIB KHAN
THE AQIB KHAN
AN INSTITUTE OF O/A LEVEL

H.W

6 A procedure `Select()` will:

1. take two integer values as parameters representing start and end values where both values are greater than 9 and the end value is greater than the start value
2. output **each** integer value between the start and the end value (**not** including the start and end values), where the sum of the last two digits is 6, for example, 142.

(a) Write pseudocode for procedure `Select()`.

Procedure

Parameter validation is **not** required.

```
PROCEDURE Select (startvalue , endvalue)
    FOR Number ← start value + 1 TO Endvalue - 1
    ThisString ← Num_TO_STR (ThisNum)
      Char1 ← Right (ThisString , 1)
      Char2 ← LEFT (RIGHT (ThisString , 2), 1)
      Total ← STR_TO_NUM (Char1) + STR_TO_Num(Char2)
      IF Total = 6 THEN
        OUTPUT Number
      ENDIF
    NEXT Number
ENDPROCEDURE
```

[7]

© UCLES 2023 9618/23/A/J/23
TAK (The AQIB KHAN) An institute of O/A level
Aki.Khan CS By AQIB Khan CS By AQIB KHAN TheAkikhan.com +92 3145030717
CS BY AQIB KHAN

(b) The check performed by procedure `Select()` on the last two digits is needed at several places in the program and will be implemented using a new function.

The new function `CheckNum()` will:

- allow the required sum to be specified (not just 6)
- check one number
- return an appropriate value.

Describe the function interface **and two** advantages of this modular approach.

Interface The number will take two parameters, number so to check the number and the total, so to check that digits are equal. Returns Boolean

Advantage 1 Check num can be called often as much as required

Advantage 2 CheckNum is passed as parameter so to make program easier.

[4]

CS BY AQIB KHAN
THE AQIB KHAN
AN INSTITUTE OF O/A LEVEL

CHAP - 9

7 A school has a library system which allows students to borrow books for a length of time. Information relating to students and books is stored in text files. Student information includes name, home address, email address, date of birth, tutor and subject choices. Book information includes author, title, subject category, library location and the date that the book was borrowed.

A program helps the staff to manage the borrowing of books.

(a) A new module needs to be written to generate emails to send to students who have an overdue book. Students who are sent an email are prevented from borrowing any more books until the overdue book is returned.

The process of abstraction has been used when designing the new module.

(i) State the purpose of applying abstraction to this problem.

To filter out informat that is not necessary to solve. [1]

(ii) Identify **one** item of information that is required and **one** item that is **not** required in the new module. Justify your choices.

Item required Student Name

Justification Take the student off block to allow them to borrow further books.

Item not required Home Address

Justification Send acknowledgment to student when book is returned.

[2]

(iii) Identify **two** operations that would be required to process data when an overdue book is returned.

Operation 1 Update loan history

Operation 2 Allow students to borrow further books.

[2]

CS BY AQIB KHAN
THE AQIB KHAN AN INSTITUTE OF O/A LEVEL


FSM
CHP 12

(b) Part of the library program contains program modules with headers as follows:

Pseudocode module header
`PROCEDURE Module-X()`
`PROCEDURE Module-Y(BYREF RA : INTEGER, SA : REAL)`
`PROCEDURE Overlay()`
`FUNCTION Replace(RA : INTEGER, RB : BOOLEAN) RETURNS BOOLEAN`
`FUNCTION Reset(TA : STRING) RETURNS INTEGER`

`Module-X()` and `Module-Y()` are both called from module `Overlay()`.

Complete the structure chart.

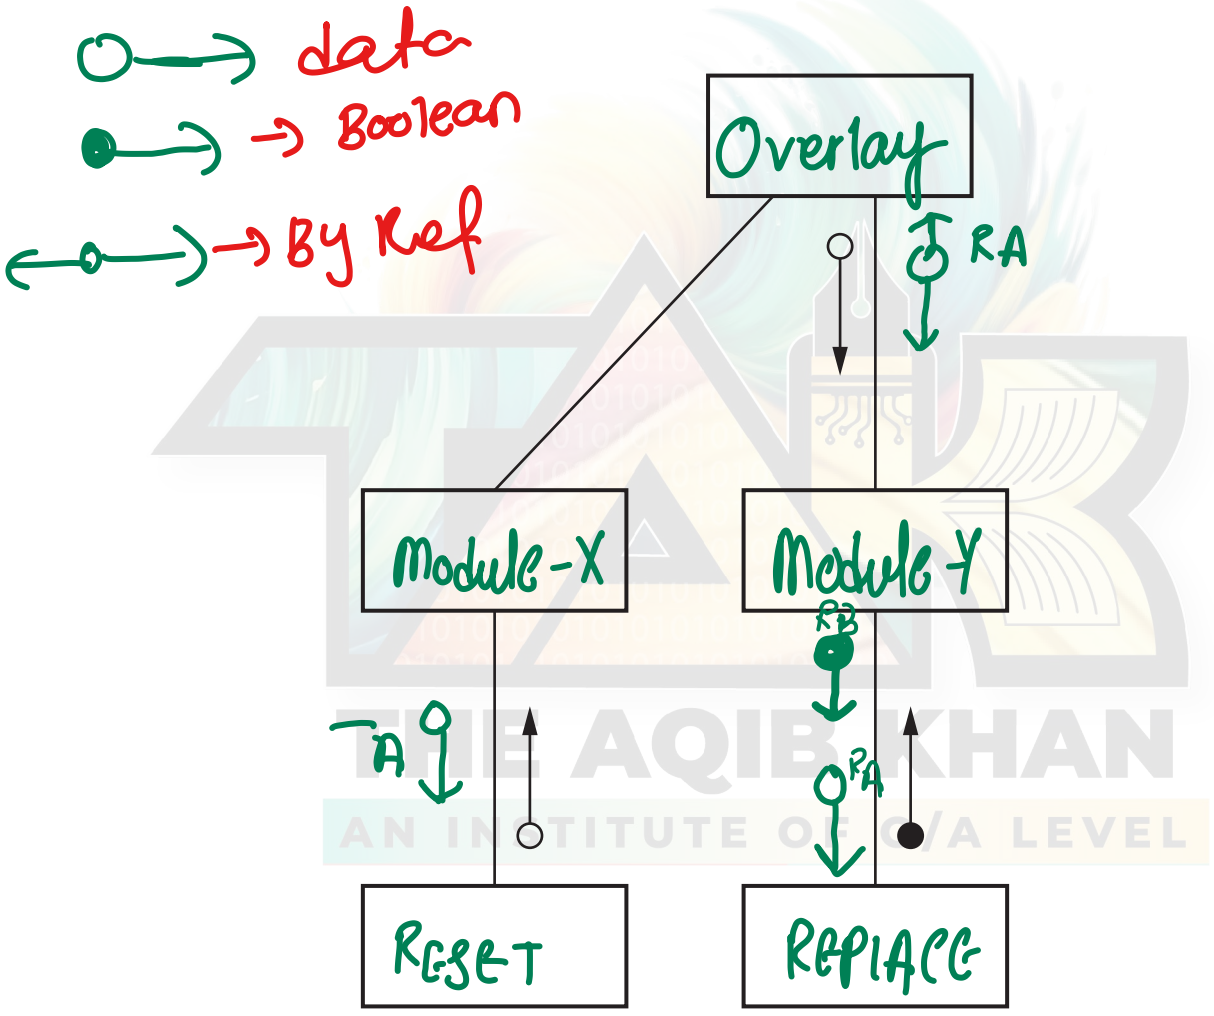

[3]

© UCLES 2023 9618/23/A/M/23

TAK (The AQIB KHAN) An institute of O/A level
Aki.Khan CS By AQIB Khan CS By AQIB KHAN TheAkikhan.com +92 3145030717
CS BY AQIB KHAN

Modular Programming

8 A computer shop assembles desktop computers, using items bought from several suppliers. A text file `Stock.txt` contains information about each item.

Information for each item is stored as a single line in the `Stock.txt` file in the format:

```
<ItemNum><SupplierCode><Description>
```

Item information is as follows:

	Format	Comment
`ItemNum` String	4 numeric characters	unique number for each item in the range "0001" to "5999" inclusive
`SupplierCode`	3 alphabetic characters	code to identify the supplier of the item
`Description`	a string	a minimum of 12 characters

The file is organised in ascending order of `ItemNum` and does not contain all possible values in the range.

The programmer has defined the first program module as follows:

| Module | Description |
|---|• called with two parameters `Code1` and `Code2` of type string that represent valid supplier codes
• creates a new file `NewStock.txt` from the contents of the file `Stock.txt` where any reference to `Code1` is replaced by `Code2`
• returns a count of the number of items that have had their supplier code changed |

Old New

CS BY AQIB KHAN
THE AQIB KHAN
AN INSTITUTE OF O/A LEVEL

(a) Write pseudocode for module `ChangeSupp()`.

```
FUNCTION ChangeSupp(Code1:STRING, Code2:STRING) RETURN Integer
OPEN FILE STOCK.txt FOR READ
OPEN FILE NEWSTOCK.txt FOR WRITE
DECLARE COUNT : INTEGER
DECLARE Item, CODE, DESC, DATA: STRING
COUNT ← 0
WHILE NOT EOF (STOCK.txt)
    READ FILE (STOCK.txt Data)
    Item ← LEFT (DATA, 4)
    CODE ← MID (DATA 5,3)
    DESC ← RIGHT(DATA, LENGTH(DATA)-7)
    IF CODE = CODE1
        THEN
            CODE ← CODE2
            DATA ← Item and CODE and DESC
            COUNT ← COUNT+1
    END IF
    WRITE FILE (NEWSTOCK.txt, DATA)
ENDWHILE
    CLOSE FILE NewStock.txt
    CLOSE FILE Stock.txt
    Return count
ENDFUNCTION
```

[8]

CS BY AQIB KHAN
THE AQIB KHAN
© UCLES 2023 9618/23/A/M/23
TAK (The AQIB KHAN) An institute of O/A level
Turn over
Aki.Khan CS By AQIB Khan CS By AQIB KHAN TheAkikhan.com +92 3145030717

(b) A new module is required:

Module	Description

`Report_1()`	• takes a parameter of type string that represents a `SupplierCode`
	• searches the `Stock.txt` file for each line of item information that contains the given `SupplierCode`
	• produces a formatted report of items for the given `SupplierCode`, for example, for supplier DRG, the output could be:
	`Report for Supplier: DRG` → Supplier code
	
	`Item  Description`
	
	`1234  USB Printer Cable 3m`
	`1273  32GB USB Flash Drive`
	`1350  Mouse Mat 320 x 240mm`
	
	`Number of items listed: 3` → count

Write pseudocode for module `Report_1()`.

```
PROCEDURE Report_1(SupplierCode : STRING)
    DECLARE COUNT : INTEGER
    DECLARE DATA, Item, DESC : STRING
    COUNT ← 0
    OPENFILE Stock.txt FOR READ
    OUTPUT "REPORT FOR Supplier", SupplierCode
    OUTPUT "Item", " ", "Description"
    WHILE NOT EOF("Stock.txt")
        READFILE ("Stock.txt", DATA)
        IF MID(DATA,5,3) = SupplierCode THEN
            ITEM ← LEFT(DATA,4)
            DESC ← MID(DATA,8,LENGTH(DATA)-7)
            OUTPUT Item, " ", DESC
            COUNT ← COUNT + 1
        ENDIF
    ENDWHILE
    OUTPUT "Number of item LISTED:", COUNT
    CLOSEFILE("Stock.txt")
ENDPROCEDURE
```

CS BY AQIB KHAN
© UCLES 2023
TAK (The AQIB KHAN) An institute of O/A level
Aki.Khan | CS By AQIB Khan | CS By AQIB KHAN | TheAkikhan.com | +92 3145030717

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

..... [6]

CS BY AQIB KHAN
THE AQIB KHAN
AN INSTITUTE OF O/A LEVEL

(c) The format of the output from module `Report_1()` from **part (b)** is changed. The number of items listed is moved to the top of the report as shown in the example:

```
Report for Supplier: DRG
Number of items listed: 3

Item        Description

1234        USB Printer Cable 3m
1273        32GB USB Flash Drive
1350        Mouse Mat 320 x 240mm
```

(i) Explain why this new layout would increase the complexity of the algorithm.

1) Must calculate the count before any item lines to be output have to be stored
2) The file has to be Read twice.

[2]

(ii) The algorithm will be modified to produce the report in the new format. The modified algorithm will be implemented so that the file `Stock.txt` is only read once.

Describe the modified algorithm.

1) Loop through the file calculating COUNT
2) SAVE SELECTED items in an Array
3) Output the count, After all lines have been Read.
4) Loop through the Array to output each array Element.

[3]

CS BY AQIB KHAN
THE AQIB KHAN
AN INSTITUTE OF O/A LEVEL

BLANK PAGE

CS BY AQIB KHAN

THE AQIB KHAN
AN INSTITUTE OF O/A LEVEL

© UCLES 2023 9618/23/A/M/23
TAK (The AQIB KHAN) An institute of O/A level
Aki.Khan CS By AQIB Khan CS By AQIB KHAN TheAkikhan.com +92 3145030717

BLANK PAGE

CS BY AQIB KHAN

THE AQIB KHAN
AN INSTITUTE OF O/A LEVEL

Permission to reproduce items where third-party owned material protected by copyright is included has been sought and cleared where possible. Every reasonable effort has been made by the publisher (UCLES) to trace copyright holders, but if any items requiring clearance have unwittingly been included, the publisher will be pleased to make amends at the earliest possible opportunity.

To avoid the issue of disclosure of answer-related information to candidates, all copyright acknowledgements are reproduced online in the Cambridge Assessment International Education Copyright Acknowledgements Booklet. This is produced for each series of examinations and is freely available to download at www.cambridgeinternational.org after the live examination series.

Cambridge Assessment International Education is part of Cambridge Assessment. Cambridge Assessment is the brand name of the University of Cambridge Local Examinations Syndicate (UCLES), which is a department of the University of Cambridge.